


K RAIN ProSeries 200 Valve

7,5 cm (3") BSP with Adapter

Model 7203-BSP

Features

- Female BSP, 7,5cm (3")
- Fiber reinforced diaphragm
- Flow control adjustment
- Energy efficient 24 VAC solenoid.
Inrush: .43 amps, Holding: .25 amps
- Self cleaning stainless-steel metering pin
- Stainless-steel diaphragm differential spring for smooth closing
- Solenoid certificate CE IP 68
- PN12 tested piece by piece at 14 bar (200 PSI)
- Bleed handle for manual opening with internal bleed

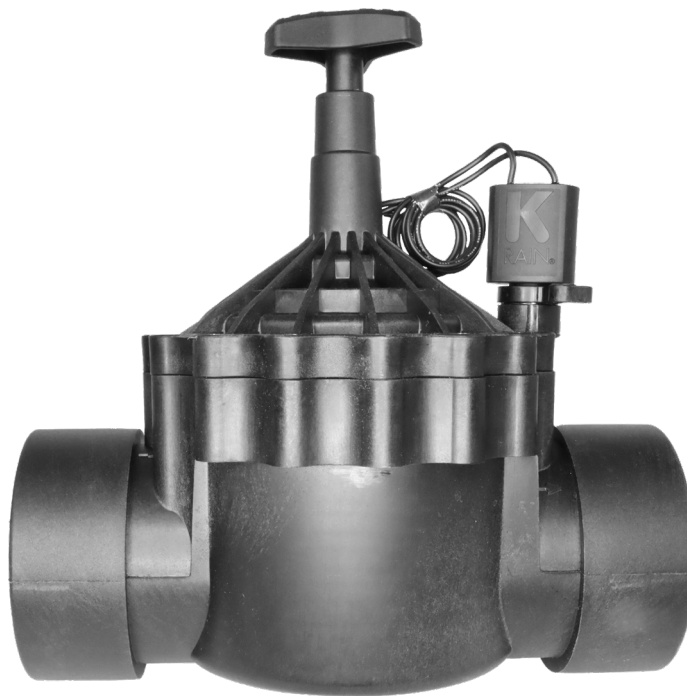

Operating Specifications

7203-BSP 3" VALVE										
Flow Rate, LPM	200	200	400	500	600	700	800	900	1000	1100
PSI Loss	0,05	0,07	0,09	0,12	0,14	0,16	0,18	0,23	0,28	0,35
Flow Rate, GPM	53	79	106	132	159	185	211	238	264	291
PSI Loss	0.73	1.02	1.31	1.74	2.03	2.32	2.61	3.34	4.06	2.08

Operating Conditions

Pressure:	min. 1.0 bar (14.5 PSI); max. 12.0 bar (174 PSI)
Temperature:	+4° C – 70° C (39° F – 158° F)

Dimensions

Height:	9.8" (25.0 cm)
Width:	10" (25.3 cm)
Length:	6.7" (17.0 cm)

Ordering Information

Part No.	Carton Qty.	Carton Size	Carton Weight	Pallet Qty.	Pallet Size	Pallet Weight
7203-BSP	6	50cm x 50cm x 31cm (19.7" x 19.7" x 12.6")	13.2 kg (29 lbs.)	96	80cm x 120cm x 170cm (31.5" x 47.25" x 67")	925 kg (2,039 lbs.)